



Product  
Catalogue

LED LIGHTING

# ABOUT GOLDTECH

## LED LIGHTING



**Technology has taken a huge leap over the past few decades and Goldtech strongly believes that technology is transforming innovation at its core.**

With the launch of Goldtech in 1995, an evolution began in the market of electronic weighing scales. Goldtech introduced latest designs for weighing scales which became benchmark for years to come. Key components like Load Cells that were imported before, soon found its manufacturing grounds in India.

Our company's main emphasis was on innovation and customization as per market requirements. We are innovators, our gamut of products helps people and businesses grow at every stage.

Goldtech has further diversified itself in the technology of the era, 'LED lighting'. Through our pioneering lighting products, we are promoting and supporting 'Save-Energy' drive. With our in-depth knowledge of technical designs, our 'Lighting Product' is playing a major role in the Indian market. Technological developments adjoined with techno-savvy in-house designs paved the way for future developments.

Our infrastructure is equipped with latest technological machines, i.e. SMT, CNC, Aluminium Die casting, Injection Molding, Hydraulic Power Press, Shearing machines to name a few. We also consider affordability a key factor, we cut costs wherever possible in order to pass the savings on to our valuable customers.

*That's why we call ourselves 'innovators'. With Goldtech - be a part of modernization !!!*

## 23 YEARS AT THE TOP OF THE INNOVATION



### Factory

+1,50,000 Sq. Ft. Floor Area

The entire design and production process are performed inside the company: This factor is the basis of our know-how and growth.



### Workforce

+250 Employees

Including Electronic, Mechanical, Electrical, Software Engineers, skilled operators and marketing professionals of long experience and professional competence



## CERTIFICATIONS



We are an "ISO 9001:2015" certified organization that follows a systematized quality monitoring system. It not only assists us to maintain high quality standards, but also to offer faultless products to our clients. Accordingly most of our products are "BIS" and "CE" certified.



## BACKLIT DOWNLIGHT

---

ASTRE SMD DOWNLIGHT  
LIORA SMD DOWNLIGHT



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Recessed

## ASTRE SMD DOWNLIGHT

Model No.	Wattage (W)	Design	Product Size (mm)	Cutout (mm)
AESD-5WR	5W	Round	ø95x26.5	ø75
AESD-5WS	5W	Square	95x95x26.5	75x75
AESD-10WR	10W	Round	ø130x26.5	ø100
AESD-10WS	10W	Square	130x130x26.5	100x100
AESD-15WR	15W	Round	ø160x26.5	ø130
AESD-15WS	15W	Square	160x160x26.5	130x130

Available in warm white, neutral white and cool white



- ✓ **Lumens/Watt:** >65
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Recessed

## LIORA SMD DOWNLIGHT

Model No.	Wattage (W)	Design	Product Size (mm)	Cutout (mm)
LASD-15WR	15W	Round	ø160x28	ø134
LASD-15WS	15W	Square	160x160x28	134x134

Available in warm white, neutral white and cool white



## CONCEALED DOWNLIGHT

---

HALLY CONCEALED DOWNLIGHT  
HELIX CONCEALED DOWNLIGHT



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 220-240V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Recessed

## HALLY CONCEALED DOWNLIGHT

Model No.	Wattage (W)	Design	CCT (K)	Driver
HYCD-5WR-DOB	5W	Round	3000/4000/6500	Inbuilt, DOB
HYCD-5WS-DOB	5W	Square	3000/4000/6500	Inbuilt, DOB
HYCD-9WR-DOB	9W	Round	3000/4000/6500	Inbuilt, DOB
HYCD-9WS-DOB	9W	Square	3000/4000/6500	Inbuilt, DOB
HYCD-12WR-DOB	12W	Round	3000/4000/6500	Inbuilt, DOB
HYCD-12WS-DOB	12W	Square	3000/4000/6500	Inbuilt, DOB
HYCD-15WR-DOB	15W	Round	3000/4000/6500	Inbuilt, DOB
HYCD-15WS-DOB	15W	Square	3000/4000/6500	Inbuilt, DOB



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 220-240V ,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Recessed

## HELIX CONCEALED DOWNLIGHT

Model No.	Wattage (W)	CCT (K)	Driver
HXCD-5WR-DOB	5W	3000/4000/6500	Inbuilt, DOB
HXCD-8WR-DOB	8W	3000/4000/6500	Inbuilt, DOB



## SPOTLIGHTS



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Mounting:** Recessed

### LEO SPOTLIGHT

Model No.	Wattage (W)	Design / Type	Product Size (mm)	Cutout (mm)
LOSPT-3WR	3W	Round, Swivel	68x45	ø55
LOSPT-5WR	5W	Round, Swivel	86x60	ø70
LOSPT-7WR	7W	Round, Swivel	86x60	ø70
LOSPT-10WR	10W	Round, Swivel	110x70	ø90
LOSPT-15WR	15W	Round, Swivel	140x85	ø120





- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Heatsink:** Aluminum die casting
- ✓ **Mounting:** Recessed

## ASTRE SPOTLIGHT

Model No.	Wattage (W)	Design / Type	Product Size (mm)	Cutout (mm)
AESPL-3W	3W	Round, Swivel	ø110x47	ø84
AESPL-5W	5W	Round, Swivel	ø110x47	ø84
AESPL-7W	7W	Round, Swivel	ø110x47	ø84
AESPL-9W	9W	Round, Swivel	ø110x47	ø84
AESPL-12W	12W	Round, Swivel	ø110x47	ø84




- ✓ **Lumens/Watt:** >75
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Heatsink:** Aluminium Die casting
- ✓ **Mounting:** Recessed

## ORISUN DEEP SPOTLIGHT

Model No.	Wattage (W)	Design / Type	Product Size (mm)	Cutout (mm)
ONDSPT-6WR	6W	Round, Swivel	ø90x88	ø88
ONDSPT-6WS	6W	Square, Fixed	90x90x88	ø88
ONDSPT-12WR	12W	Round, Swivel	ø90x88	ø88
ONDSPT-12WS	12W	Square, Fixed	90x90x88	ø88
ONDSPT-18WR	18W	Round, Swivel	ø90x88	ø88
ONDSPT-18WS	18W	Square, Fixed	90x90x88	ø88



## PANEL LIGHTS

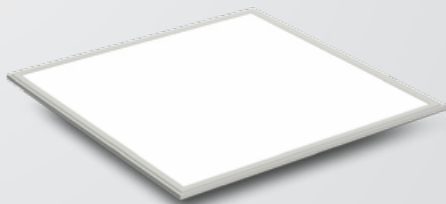

- ✓ **Lumens/Watt:** >80
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die Casting
- ✓ **Mounting:** Recessed

### SEGEN EDGELIT 2x2

Model No.	Wattage (W)	Design	Cutout (mm)
SNE2-40W	40W	Square	610x610

Available in cool white



- ✓ **Lumens/Watt:** >75
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Mounting:** Recessed

## ORISUN SLIM PANEL LIGHT

Model No.	Wattage (W)	Design	Product Size (mm)	Cutout (mm)
ONSP-6WR	6W	Round	ø120x20	ø100
ONSP-6WS	6W	Square	120x120x20	100x100
ONSP-12WR	12W	Round	ø170x20	ø145
ONSP-12WS	12W	Square	170x170x20	145x145
ONSP-18WR	18W	Round	ø225x20	ø196
ONSP-18WS	18W	Square	225x225x20	196x196
ONSP-24WR	24W	Round	ø300x20	ø270
ONSP-24WS	24W	Square	300x300x20	270x270

Available in warm white, neutral white and cool white



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-300V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Mounting:** Recessed

## ASTERIX TRIM PANEL LIGHT

Model No.	Wattage (W)	Design	Product Size (mm)	Cutout (mm)
AXTP-6WR	6W	Round	ø130x15	ø105
AXTP-6WS	6W	Square	130x130x15	105x105
AXTP-9WR	9W	Round	ø130x15	ø105
AXTP-9WS	9W	Square	130x130x15	105x105
AXTP-12WR	12W	Round	ø155x15	ø155
AXTP-12WS	12W	Square	155x155x15	155x155
AXTP-15WR	15W	Round	ø155x15	ø155
AXTP-15WS	15W	Square	155x155x15	155x155

Available in warm white, neutral white and cool white



## SURFACE LIGHTS



- ✓ **Lumens/Watt:** >70
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-300V,50Hz
- ✓ **PF:** >0,9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Mounting:** Surface mounted

### STELLAR SURFACE LIGHT

Model No.	Wattage (W)	CCT (K)	Product Size (mm)	Body Color
SRSL-5W	5W	3000/4000/6500	50x75	Black/White
SRSL-10W	10W	3000/4000/6500	60x76	Black/White
SRSL-20W	20W	3000/4000/6500	99x97	Black/White



- ✓ **Lumens/Watt:** >75
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Surface mounted

## ASTRE SURFACE LIGHT

Model No.	Wattage (W)	Design	Product Size (mm)
AESL-6WR	6W	Round	ø181x29
AESL-6WS	6W	Square	181x181x29
AESL-12WR	12W	Round	ø181x29
AESL-12WS	12W	Square	181x181x29

Available in warm white, neutral white and cool white




- ✓ **Lumens/Watt:** >75
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Aluminium Die casting
- ✓ **Mounting:** Surface mounted


## ORISUN SURFACE LIGHT

Model No.	Wattage (W)	Design	Product Size (mm)
ONSL-9WR	9W	Round	ø124x38
ONSL-9WS	9W	Square	124x124x38
ONSL-12WR	12W	Round	ø174x38
ONSL-12WS	12W	Square	174x174x38
ONSL-15WR	15W	Round	ø174x38
ONSL-15WS	15W	Square	174x174x38

Available in warm white, neutral white and cool white



T5 Square Batten



T5 Mushroom Batten



T8 Retrofit

- ✓ **Lumens/Watt:** >90
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Wall Mounting

## DAZZLE TUBELIGHTS

Model No.	Wattage (W)	Design	Length
DET5-5WS/DET5-5WM	5W	T5 Square/T5 Mushroom	280
DET8-5WRET	5W	T8 Retrofit	280
DET5-10WS/DET5-10WM	10W	T5 Square/T5 Mushroom	565
DET8-10WRET	10W	T8 Retrofit	565
DET5-20WS/DET5-20WM	20W	T5 Square/T5 Mushroom	1130
DET5-20WRET	20W	T8 Retrofit	1130

Available in warm white, neutral white and cool white



## STRIP LIGHTS



- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9

### EVONA STRIP LIGHT

Model No.	Wattage (W)	LED Package	Length (meters)	Color
EASL-5050-15W	15W	5050	5	Warm white/cool white/RGB
EASL-5050-30W	30W	5050	5	Warm white/cool white/RGB
EASL-2835-12W	12W	2835	5	Warm white/cool white/RGB
EASL-2835-24W	24W	2835	5	Warm white/cool white/RGB



## OUTDOOR / INDUSTRIAL LED LIGHTS



- ✓ **CRI:** >70
- ✓ **Voltage:** 110-310V, 50Hz
- ✓ **PF:** >0.9
- ✓ **Mounting:** Suspended

### SOLAS HIGHBAY LIGHTS

Model No.	Wattage (W)	CCT (K)	Light Source
SSHB-50W	50W	6500	SMD LED
SSHB-100W	100W	6500	SMD LED
SSHB-150W	150W	6500	SMD LED
SSHB-200W	200W	6500	SMD LED





- ✓ **CRI:** >70
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Mounting:** Wall / Brackets

## CLAIRE FLOOD LIGHTS

Model No.	Wattage (W)	Light Source	CCT (K)	IP Rating
CEFL-30W	30W	SMD LED	3000/4000/6500	IP66
CEFL-50W	50W	SMD LED	3000/4000/6500	IP66
CEFL-80W	80W	SMD LED	3000/4000/6500	IP66
CEFL-100W	100W	SMD LED	3000/4000/6500	IP66
CEFL-150W	150W	SMD LED	3000/4000/6500	IP66
CEFL-200W	200W	SMD LED	3000/4000/6500	IP66



- ✓ **CRI:** >70
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Mounting:** Pole Mounted

## LUSTRE STREET LIGHTS

Model No.	Wattage (W)	Light Source	CCT (K)	IP Rating
LESL-30W	30W	SMD LED	6500	IP66
LESL-50W	50W	SMD LED	6500	IP66
LESL-80W	80W	SMD LED	6500	IP66
LESL-100W	100W	SMD LED	6500	IP66



## TRACK LIGHTS



- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Mounting:** Channel

### VIVID TRACK LIGHT

Model No.	Wattage (W)	Light Source	CCT (K)
VDTL-10W	10W	COB	3000
VDTL-20W	20W	COB	3000
VDTL-30W	30W	COB	3000
VDTL-40W	40W	COB	3000



- ✓ **Lumens/Watt:** >85
- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Housing:** Polycarbonate
- ✓ **Mounting:** Holder

## VIVO BULB

Model No.	Wattage (W)	Product Size (mm)
VOBB-6W	6W	ø82x57
VOBB-9W	9W	ø87x60
VOBB-12W	12W	ø110x65

Available in warm white, neutral white and cool white



- ✓ **CRI:** >80
- ✓ **Voltage:** 110-310V,50Hz
- ✓ **PF:** >0.9
- ✓ **Mounting:** Surface Mounting

## SENSO MOTION SENSING LIGHT

Senso is a PIR sensor based smart light with a range of approximately 10 meters. Can be easily installed in lift lobbies, common staircases, bathrooms and parking areas.

Model No.	Wattage (W)	IP Rating	CCT (K)
SOMS-10WR	10W	IP66	3000/4000/6500
SOMS-15WS	15W	IP66	3000/4000/6500
SOMS-20WR	20W	IP66	3000/4000/6500
SOMS-25WS	25W	IP66	3000/4000/6500

## Precision Electronic Instruments Co



### **Corporate Office**

No. 17, Paschim Vihar Extension, New Rohtak Road,  
New Delhi - 110063



### **Manufacturing Unit**

1256, MIE, Part B, Bahadurgarh, Distt Jhajjar  
Haryana



1800-3000-0755



[sales@goldtechworld.com](mailto:sales@goldtechworld.com)



[www.goldtechlighting.com](http://www.goldtechlighting.com)  
[www.goldtechworld.com](http://www.goldtechworld.com)